



■ 尺寸图


● 接头端子为双面时 (端子形状: \square)

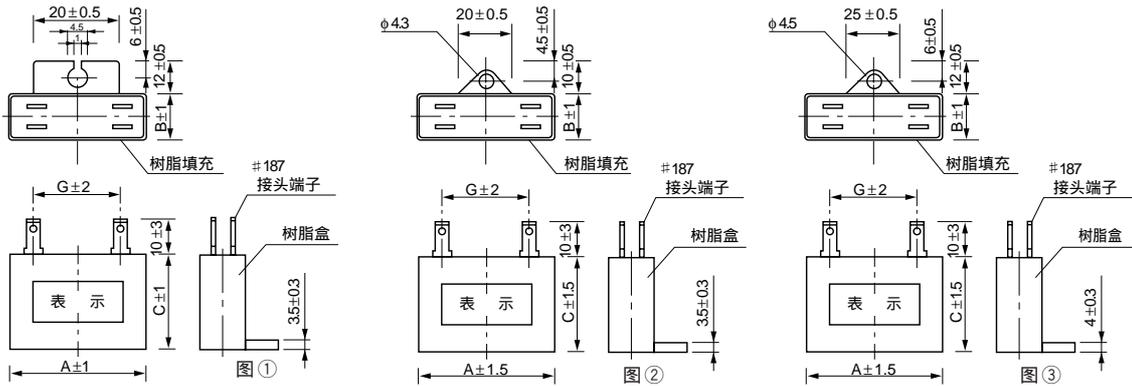


● 接头端子为单面时 (端子形状: \sqcap)

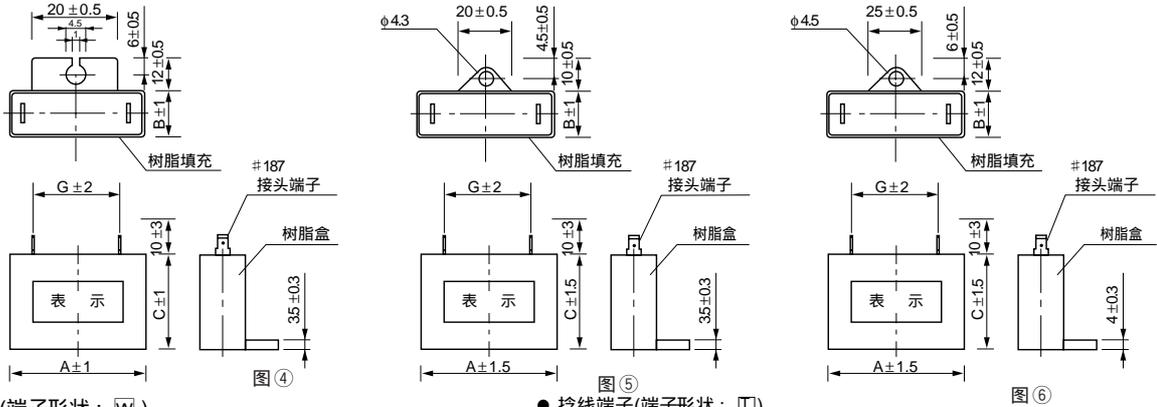

● 针形端子 (端子形状: \sqcap)

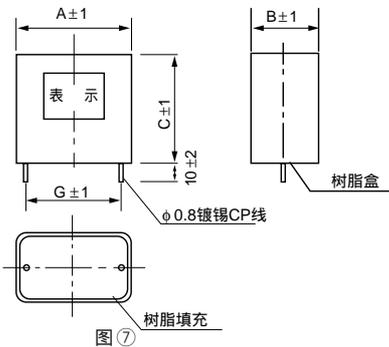


● 捻线端子 (端子形状: \sqcap)

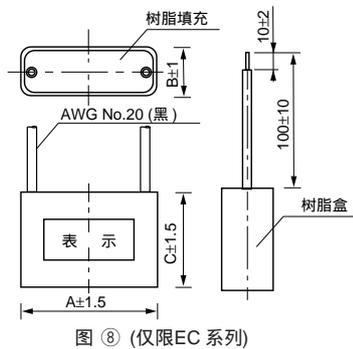

备注 : 1) 接头端子以带安装插脚为标准型
但无插脚的也承接制作
2) AB的尺寸为底边部分尺寸
3) 在盒开口部中央的尺寸如下:

上述B尺寸的±1.0mm以内



4) 针形端子只承接盒尺寸A = 37mm品制作

■ 标准尺寸表

盒尺寸 (mm)			盒尺寸记号 ()内是针形端子用的记号	引线间距尺寸 G (mm)							
A	B	C		端子形状 \square		端子形状 \sqcap					
				端子双面	图	端子单面	图	端子双面	图		
37.0	11.5	25.0	01	27.0	①	30.0	④	34.2	⑦	—	⑧
37.0	13.5	27.0*	02 (09)**								
37.0	15.5	29.0	03 (27)**								
37.0	17.5	31.0	04 (11)***								
37.0	19.5	33.0	05								
37.0	21.5	35.0	06								
37.0	24.0	37.0	07								
48.0	21.5	35.0	13	37.0	②	40.0	⑤	—	—		
48.0	24.0	38.0	14								
58.0	26.0	40.0	15								
58.0	30.0	44.0	16	47.0	③	50.0	⑥	—	—		
58.0	34.0	49.0	31								

* 盒尺寸37.0 × 13.5 × 28.0mm的产品为针形端子及捻线端子时, C尺寸为28.0mm。(盒尺寸记号: 09)

** 盒尺寸37.0 × 15.5 × 29.0mm的产品为针形端子及捻线端子时, 盒尺寸记号: 27

*** 盒尺寸37.0 × 17.5 × 31.0mm的产品为针形端子及捻线端子时, 盒尺寸记号: 11