


VY 广温度范围用小形化品
系列




- VZ系列的1~2个级别小形化品
- RoHS指令(2002/95/EC)已对应完毕.

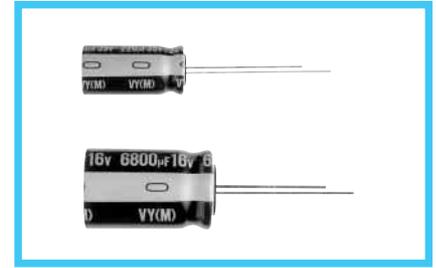

■ 仕様

项目	性能										
分类温度范围	-55 ~ +105°C (6.3 ~ 100V), -40 ~ +105°C (160 ~ 400V), -25 ~ +105°C (450V)										
额定电压范围	6.3 ~ 450V										
额定静电容量范围	0.1 ~ 68000μF										
额定静电容量容许差	± 20% (120Hz, 20)										
漏损电流	额定电压(V)	6.3 ~ 100									
		160 ~ 450									
		I=0.03CV 或 4 (μA)中的较大值以下 (1分値) I=0.01CV 或 3 (μA)中的较大值以下 (2分値)									
		CV ≤ 1000: I=0.1CV+40 (μA) 以下 (1分値) CV > 1000: I=0.04CV+100 (μA) 以下 (1分値)									
tan δ	对于超过1000 μF的产品, 每增加1000 μF, 其值便随之增加 0.02. 120Hz 20°C										
	额定电压(V)	6.3	10	16	25	35	50	63	100	160 ~ 250	350 ~ 450
	tan δ (MAX.)	0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.20	0.25
温度特性	120Hz										
	额定电压(V)	6.3	10	16	25	35~50	63~100	160~200	250~350	400	450
	电阻率	Z-25°C / Z+20°C	5	4	3	2	2	3	4	6	15
	ZT / Z20 (MAX.)	Z-40°C / Z+20°C	10	8	6	4	3	3	4	8	10
耐久性	在105 °C下, 连续印加额定电压1000小时后, 应满足右边项目.										
		静电容量变化率	初始值的 ± 20% 以下								
		tan δ	初始标准值的200% 以下								
		漏损电流	初始标准值以下								
高温无负荷特性	在105 °C下, 无负荷放置1000小时后, 应满足上述耐久性的标准值.										
表示	在黑色外套上标示白色										


■ 尺寸图

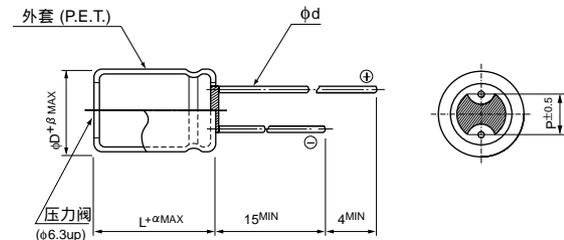

	(mm)										
φD	5	6.3	8	10	12.5	16	18	20	22	25	
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10.0	10.0	12.5	
φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8	1.0	1.0	1.0	
β	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	1.0	1.0	

α	(L < 20) 1.5
	(L ≥ 20) 2.0

品号编码体系 (例: 10V 330μF)

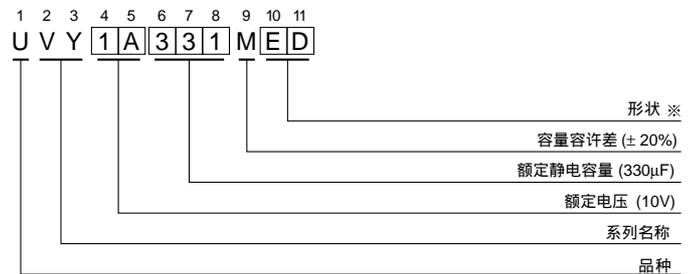

※ 形状	
φ D	无铅电镀端子 PET外套品编码
5	DD
6.3	ED
8 · 10	PD
12.5 ~ 18	HD
20 ~ 25	RD

■尺寸表

φD×L (mm)

V (μF) 额定静容量	品号编码	6.3		10		16		25		35		50		63	
		0J		1A		1C		1E		1V		1H		1J	
0.1	0R1											5×11	1.3		
0.22	R22											5×11	2.9		
0.33	R33											5×11	4.3		
0.47	R47											5×11	7		
1	010											5×11	13		
2.2	2R2											5×11	20		
3.3	3R3											5×11	25		
4.7	4R7											5×11	30		
10	100											5×11	46		
22	220											5×11	68	5×11	71
33	330											5×11	90	6.3×11	100
47	470									5×11	93	6.3×11	115	6.3×11	120
68	680									6.3×11	110	6.3×11	150	8×11.5	155
100	101							5×11	125	6.3×11	150	8×11.5	190	8×11.5	200
220	221			5×11	155	6.3×11	190	6.3×11	200	8×11.5	250	10×12.5	300	10×16	335
330	331			6.3×11	210	6.3×11	225	8×11.5	275	10×12.5	350	10×16	410	10×20	510
470	471			6.3×11	250	8×11.5	315	10×12.5	380	10×16	460	10×20	540	12.5×20	640
1000	102	8×11.5	390	10×12.5	460	10×12.5	500	10×16	610	12.5×20	810	12.5×25	950	16×25	930
2200	222	10×16	635	10×16	705	10×20	710	12.5×25	1090	16×25	1260	16×31.5	1410	18×35.5	1650
3300	332	10×20	840	12.5×20	1000	12.5×25	1170	16×25	1400	16×31.5	1500	18×35.5	1770	20×40	1950
4700	472	12.5×20	1090	12.5×25	1260	16×25	1500	16×25	1570	16×35.5	1780	20×40	2100	22×50	2450
6800	682	12.5×25	1350	16×25	1570	16×25	1600	16×35.5	1850	18×40	2000	22×50	2500	25×50	2800
10000	103	16×25	1650	16×31.5	1820	16×35.5	1930	18×40	2000	22×50	2650	25×50	2850		
15000	153	16×31.5	1820	16×35.5	2050	18×40	2210	22×50	2750	25×50	3100				
22000	223	18×35.5	2280	18×40	2420	22×40	2710	25×50	3250						
33000	333	20×40	2500	22×50	3210	25×50	3450								
47000	473	22×50	2780	25×50	3570										
68000	683	25×50	3070												铝壳尺寸

V (μF) 额定静容量	品号编码	100		160		200		250		350		400		450	
		2A		2C		2D		2E		2V		2G		2W	
0.1	0R1	5×11	1.5			6.3×11	1.5								
0.22	R22	5×11	3.4			6.3×11	3.3								
0.33	R33	5×11	5.0			6.3×11	5								
0.47	R47	5×11	7.1			6.3×11	11					6.3×11	8.5		
1	010	5×11	15			6.3×11	16					6.3×11	14		
2.2	2R2	5×11	21			6.3×11	25			6.3×11	21	8×11.5	27	8×11.5	20
3.3	3R3	5×11	29			6.3×11	30	6.3×11	28	8×11.5	30	8×11.5	34	10×12.5	28
4.7	4R7	5×11	32			6.3×11	35	6.3×11	35	8×11.5	39	10×12.5	42	10×12.5	32
10	100	5×11	50	8×11.5	41	8×11.5	57	10×12.5	71	10×12.5	64	10×16	64	10×20	27
22	220	6.3×11	93	10×12.5	92	10×16	105	10×20	105	12.5×20	105	12.5×25	140	12.5×25	100
33	330	8×11.5	130	10×16	125	10×20	140	10×20	140	12.5×25	170	16×25	170	16×25	125
47	470	8×11.5	140	10×20	150	12.5×20	195	12.5×20	190	16×25	210	16×25	200	16×31.5	155
68	680	10×12.5	190	12.5×20	250	12.5×25	250	16×25	270	16×25	285	16×31.5	240	18×35.5	185
100	101	10×16	240	12.5×25	310	16×25	320	16×25	310	18×35.5	370	18×35.5	310	18×40	200
220	221	12.5×20	390	16×31.5	410	16×35.5	500	18×35.5	485	22×50	540	22×50	460	25×50	250
330	331	12.5×25	540	18×35.5	570	18×40	675	20×40	710	25×50	710				
470	471	16×25	715	18×40	855	22×40	925	22×50	1000						
1000	102	18×35.5	960	25×50	1350										
2200	222	22×50	1750												
3300	332	25×50	2070												铝壳尺寸

105 120Hz时的额定纹波电流 (mA rms)

●额定纹波电流的频率修正系数

V	Cap.(μF)	频率					
		~68	50Hz	120Hz	300Hz	1 kHz	10 kHz ~
6.3 ~ 100	~68	0.75	1.00	1.35	1.57	2.00	
	100 ~ 470	0.80	1.00	1.23	1.34	1.50	
	1000 ~ 68000	0.85	1.00	1.10	1.13	1.15	
160 ~ 450	0.1 ~ 220	0.80	1.00	1.25	1.40	1.60	
	330 ~ 1000	0.90	1.00	1.10	1.13	1.15	